























&




Compatible Table


~Setting by SANWA Transmitters~

Products	M17	M12S(RS) EXZES ZZ	MT-44	MT-S	M12 EXZES-Z
	RX-491/482 RX-472/47T	RX-482 RX-472/47T	RX-482 RX-472/47T	RX-482 RX-472/47T	RX-482 RX-472/47T
 <p>SUPER VORTEX Gen2 PRO SUPER VORTEX Gen2 SUPER VORTEX Stock</p>				X	X
 <p>SUPER VORTEX ZERO / SPORT / TYPE-D (PLUS ZERO / SPORT / TYPE-D)</p>					
 <p>SGS-01C / SGS-01D</p>					
 <p>PGS-LH / XB / XR PGS-CL / CX</p>				X	X


SSL10 with Short Y-Harness

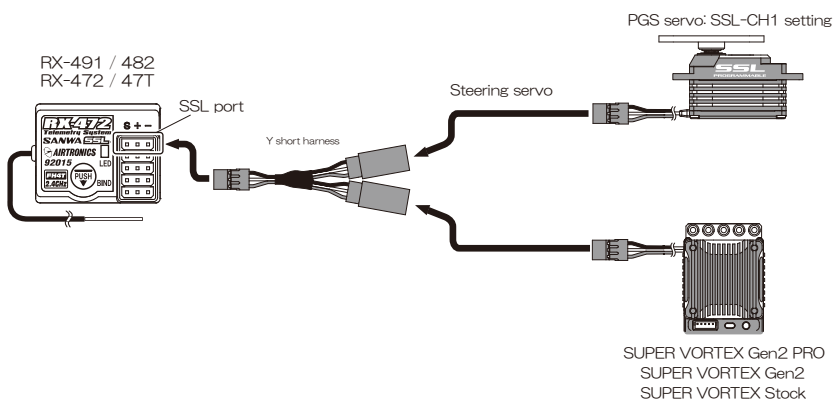

Example Short Y-Harness

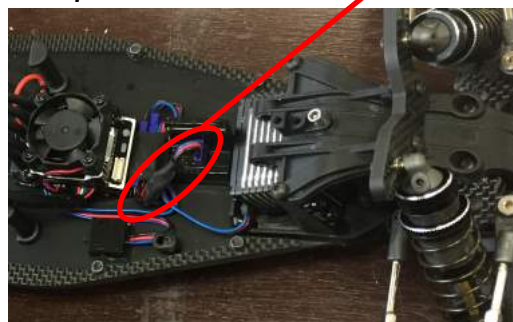

SERVO: PGS-XB ESC: SUPER VORTEX GEN2 Pro

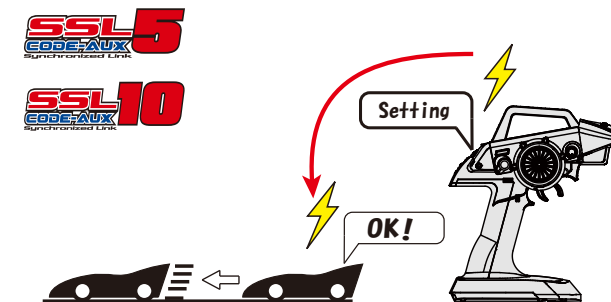

Benefit to use SSL Channel !!

1. Available to change setting during driving !!
2. Fit surface conditions very easy!!
3. Fit tires conditions very easy!!
4. Save time for setting!!