

**SANWA** New Arrival

# PGS-HR

**SXR**  
XSTREAM RESPONSE


For 1/12 Scale

THE MOST SMOOTH  
THE BEST PERFORMANCE

With



4 times faster than SSR

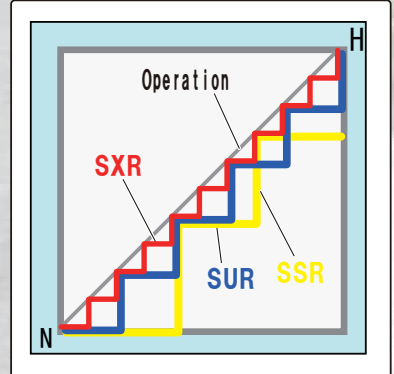

\*SXR mode image

# PGS-HR

Innovation from SRG-HR/HS

# SANWA



## Features

**\*Voltage: 3.7 - 6.0 V**  
**(Reccomend BEC: 6.0 V / Above 2.75A)**

**\*Dimensions: 27.0 x 12.1 x 30.5 mm**

**\*Weight: 24 g**

**\*Speed: 0.10 sec/60° (6.0V)**  
**0.16 sec/60° (3.7V)**

**\*Torque: 3.8 kg • cm (6.0V)**  
**5.8 kg • cm (3.7V)**

**\*Black Harness**

**\*PROGRAMMABLE SERVO**

**Lead length !!**

**180 mm → 130 mm**

**The Best Response !!**

**The Best Smooth !!**

**Increased Endurance!!**

**Easy to Set UP!!**

**More Fitable to 1/12 scale**

**10 times faster than HR/HS**

**4 times smooth than HR/HS**

**4 times strength than HR/HS**

**3 different preset types can be set  
by Multi Setting Gear**

Mild —————> Quick  
Type 1 < Default < Type 2 < Type 3



# PGS-HR

## Preset by Multi Setting Gear



Mild ←————→ Quick

TYPE	type1	Default	type2	type3
STRETC	55	50	60	60
BOOST	25	30	35	60
D-BAND	1	2	0	1
MV-MID	50	50	45	50
MV-END	30	30	30	30
BRAKE	0	15	15	5
MV-HLD	2	2	2	2
MV-FRQ	100	100	100	100
MAX-PW	50	100	90	90